



9 BAND
 50Hz, 120Hz, 250Hz, 500Hz
 1kHz, 2kHz, 4kHz, 8kHz, 16kHz

SPECIFICATIONS

MAX EQ2-9BT	
Component	Equalizer
EQ	9 band
EQ band	50Hz, 120Hz, 250Hz, 500Hz, 1kHz, 2kHz, 4kHz, 8kHz, 12kHz
Pre-out channels	3 pairs
Input mode	Main / AUX / BT
Bluetooth 5.0	Yes
Freq. response	10-50 000Hz (+/-1db)
Output (RMS)	6V
Output (MAX)	7V
THD @ 6V	0.01%
Boost / Cut	12dB

S/N ratio	101dBA
Input sensitivity	50mV-3V
Head room	20dB
Input impedance	20kOhm
Output impedance	1kOhm
Stereo separation	82dB/1kHz
Power voltage	11-15V
Rem output Voltage	12V
Subwoofer crossover	30-200Hz 18dB/Oct
ATO (Auto Turn On)	DC-Offset HI level

MAX EQ2-9BT

TWEAK WITH SUPER PRECISION

We've taken control to the next level with a powerful and intuitive 9 band graphical. No nonsense and no extra noise added thanks to its high-quality internal components, with exceptional linear frequency response from top to bottom.

THE QUICK AND EASY WAY

Shape your favorite music according to your liking. Do you want to boost the bass and cut some treble? Or do you want to alter the master volume (or even the subwoofer level)? Why not adjust the fader with awesome precision? This is all at your fingertips with the MAX EQ2-9BT.


TAKE CONTROL

The equalizer should never be the weakest link in your sound system. This powerful EQ features three pairs of 6V (RMS) gold plated and low impedance RCA inputs, high level inputs for easy installation and an automatic turn off system.

WIRELESS FREEDOM WITH BLUETOOTH 5.0

We live in a digital age and you're never more than a few taps away from playing a song, a playlist or a collection of awesome beats. Stream directly from your phone, tablet or computer directly to the equalizer via Bluetooth 5.0! Showing off your sound system has never been easier.

DIMENSIONS

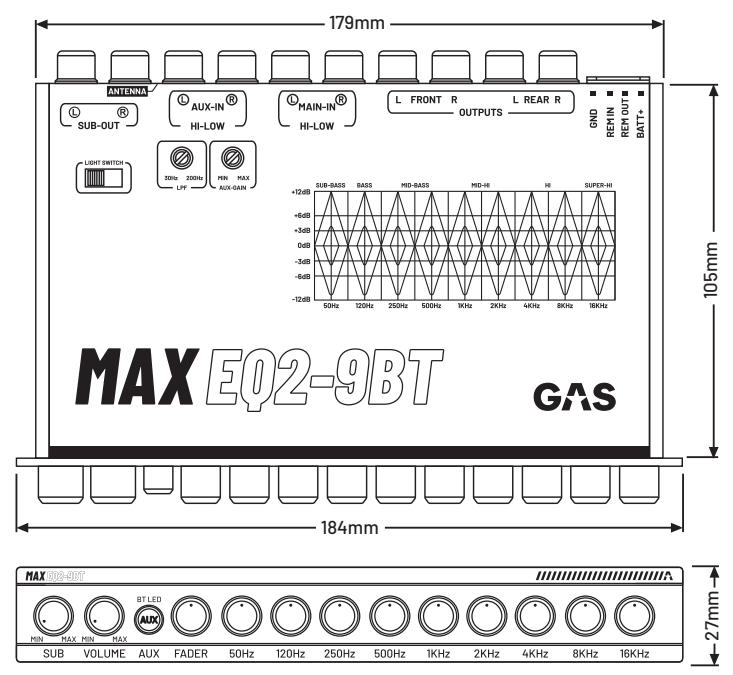

INCLUDED ACCESSORIES

